

## Specifications

### 1. Standard model : OTS5310 Duplex Surface Slitter Rewinder

2. **Application** : 2 shafts center-surface type winding, suitable for slitting various PVC,PET films.

### 3. Feature:


- |                                    |                                |
|------------------------------------|--------------------------------|
| A. Main Motor                      | F. Winding Arithmetic Tension  |
| B. Up and Down Kinves Transmission | G. Send Material Fan           |
| C. Tension Detect                  | H. Winding Roller Air Pressure |
| D. Winding Air Pressure Roller     | I. Length Counter              |
| E. Winding Motor                   | J. Static Clear Up Machine     |

### 4. Optional Part:

- (1). Special Unwind Base : Separated type with hydraulic core chuck can be equipped for efficient and quick performance on jumbo roll change.
- (2). Connected Splice Table : Splicing materials smoothly in order to decrease production loss.

### 5. Specification:

Machine Width	1.3 M / 1.6 M	Max. Unwind O.D	Ø1000 mm
Min.Slitting Width	20 mm	Rewind Core I.D	3" (Ø76.2 mm )
Material Thinkness	0.1~0.5 mm	Machine Speed	0-180 M/min
Max.Rewind O.D	(0.1mm)Max.Ø400 mm、 (0.5mm)Max.Ø800 mm		

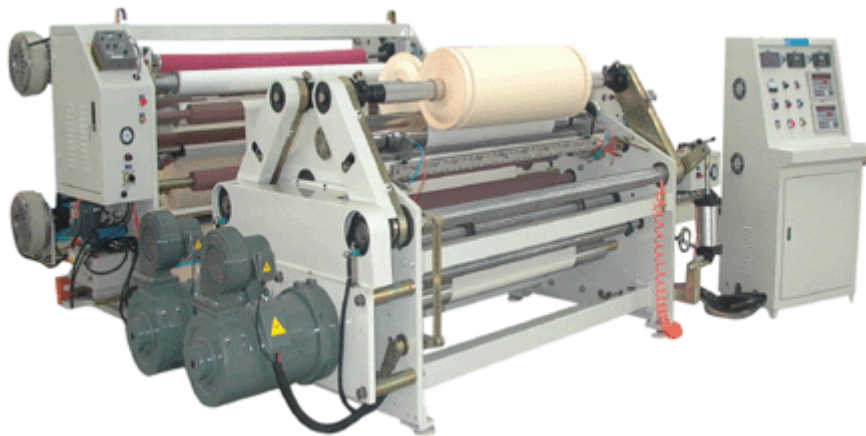

Images and specifications may not represent the exact product associated with above picture and information provided in this document pertain to O-Tape brand products and are subject to change at any time, without notice.